



## General Performance Data

Engine	Brand	Weichai
	Model	WP4.1D66E200
Control module	DATAKOM D500 MK3	
Starting voltage	V	24
Frequency	Hz	50
Number of phases	3	

	Prime	Standby	
Power kVA	63	69	
Power kW	50	55	
Rated speed	r.p.m	1500	
Standard voltage	V	220	127
Available voltages	V	380	415
Power factor	Cos Phi	0.8	

## Open



Dimension		
Length (L)	mm	0000
Height (H)	mm	0000
Width (W)	mm	0000
Weight	Kg	0000
Fuel Tank	L	0000

## Silent



Dimension		
Length (L)	mm	2550
Height (H)	mm	1250
Width (W)	mm	1000
Weight	Kg	1068
Fuel Tank	L	115

## Fuel Consumption

Rated Output	g/KW.h	L/h
100% Standby	0000	15.5
100% Prime	0000	13.7
75% Prime	0000	10.32
50% Prime	0000	6.85
25% Prime	0000	0000

## Standards Followed

ISO9001	ISO14001
ISO8528	ISO12100
ISO13849	EN12601
GB12786	GB/T2820
IEC60034	IEC60204
CE	RETIE

## General Engine Data

Engine brand	Weichai	
Engine ref.	WP4.1D66E200	
Engine type	4 -stroke diesel	
Governor type	Electronic	
Injection	Direct	
Aspiration	Turbocharged and intercooled	
Number of cylinders and arrangement	4 - L	
Bore and stroke	mm	105 x 118

Displacement	L	4.087
Cooling system	Water - Cooling	
Lube oil consumption with full load	0.5%-1% of fuel consumption	
Compression ratio	17.5:1	
Engine oil capacity	L	13
Total coolant capacity	L	9.4
Air filter	Type	Dry

Diesel engine	Dry air filter
4-stroke cycle	Radiator with pusher fan
Water-cooled	Electronic governor
12V electrical system	Hot parts protection
Water separator filter	Moving parts protection

### Optionals

Water jacked heater
Radiator water level sensor
Oil heater
Heavy duty air filter



## Alternator Specifications


Number of phase	3
Power factor	0.8
Poles	4
Winding Connections (standard)	Star-serie
Insulation	H class
Enclosure (according IEC-34-5)	IP 23

Excitation system	Shunt
Voltage regulator	Electronic
No. of bearings	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)

Self-excited and self-regulated
IP23 protection
H class insulation

### Optionals

Alternator pre-heater
Winding temp. measuring instrument
PMG / AREP / MAUX

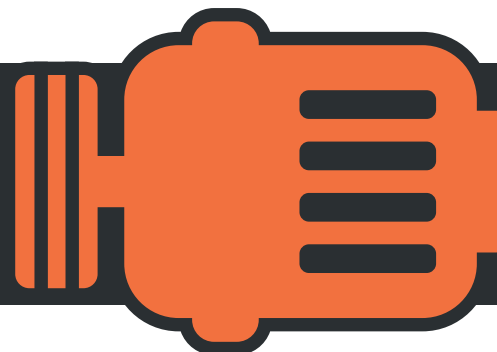

## Application Data

### Fuel system

	Open	Silent
Fuel oil specifications	Diesel	
Standard fuel tank capacity	L 0000	115

### Air system

Intake air flow	L/s (m3/min)	302
Cooling air flow	m <sup>3</sup> /s	

### Exhaust system

Maximum exhaust temperature	°C	560
Exhaust gas flow	L/s (m3/min)	315.3
Maximum allowed back pressure	kPa	10

### Starting system

Starting power	kW	3.3
Recommended battery	Ah	90
Number of batteries		2
Auxiliary voltage	Vdc	24

## Genset version

Steel chasis	High mechanical strength
Emergency stop button	Epoxy polyester powder coating
Anti-vibration shock absorbers	Fuel tank drain plug
Chassis with integrated fuel tank	Steel residential silencer - 20dbA attenuation
Fuel level gauge	Battery charger

### Optionals

Trailer type



Water-cooled



Three phase



50 Hz



Diesel



Stackable canopy

## Standard reference conditions

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Weights and dimensions based on standard products. Illustrations may include optional equipment. Technical data described in this catalogue correspond to the available information at the moment of printing.

## Control Panel Data

Features of the control panel	Basic Model (Standard)	Advanced Model (Optional)
Voltage between phases	o	o
Voltage between neutral and phase	o	o
Current intensities	o	o
Frequency	o	o
Apparent power (kVA)	o	o
Active power (kW)	o	o
Reactive power (kVAr)	o	o
Power factor	o	o
Voltage between phases	o	o
Emergency stop	o	o
Binary inputs	6/6	7/7
Analog inputs	3	3
2x10A Current outputs	o	-
I/O Configuration	o/o	o/o
D+ Function	o	o
Speed sensor	o	o
Amf/Mrs	o/o	o/o
GCB/MCB	o/o	o/o
3ph voltage measurement Gen./Mains	o/o	o/o
3ph current measurement	o	o
kW / kWh / kVA	o	o
Engine reading	o	o
Engine protection	o	o
Alternator protection	o	o
Earth current protection	-	x
History file	150	350
RTC/Battery	o/-	o/o
PLC	-	-
4G	x	-
Airgate	-	x
ECU CAN	o	o
MODBUS	x	x
MODBUS IP	x	x
SNMP	-	x
SNMP TRAPS	-	-
RS232	x	x
RS485	x	x
GSM/GPRS modem	x	x
Remote screen	x	x
Software for PC	x	x

Standard: o    Optional: x    Not Available: -